NEXUS nano

4 Serial Ports
NN-SER-01
1011-A010601A

Serial Ports
DB-9 Connections

SERIAL PORT

1	DCD	-nc-
2	TxD	
3	RxD	
4	DSR	-nc-
5	GND	
6	DTR	-nc-
7	CTS	
8	RTS	
9	RI	-nc-

RX
TX
GND
RTS
CTS

RS-232 DB-9
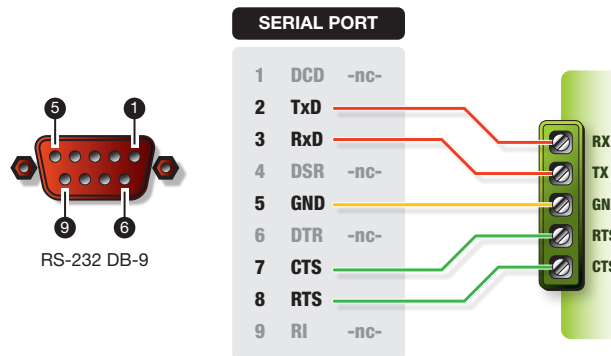
Features/Benefits

✓ Provides access to legacy equipment.

✓ Supports TELNET-To-Serial/Remote Serial Port Management.

✓ Complemented by wide range of software features like auto-logging.

Technical Specifications

Parameters	Baud Rate: 50 to 115,200 Baud
	Bits: 5 to 8 Bits/Character
	Stop Bits: 1 or 2
	Parity: Even, Odd, None
	Handshaking: RTS/CTS, XON/XOFF, None
TELNET-To-Serial	Available, per port masking
Special Functions	Pattern matching, auto-logging, logon injection, auto session shutdown
Connectors	4 x 5 position pluggable screw terminal, 3.5mm pitch
Configuration	Up to 8 NN-SER-01 modules = 32 serial/RS-232 ports

IOX Slot TYPE 1
NEXUS nano

Optima

4-20 Cachet Woods Court
Markham ON L6C 3G1
Canada

sales@optimatele.com

Tel +1 905 477 0987 Option 1
Fax +1 905 477 5579

http://www.OptimaTele.com

MADE IN CANADA